

HOLLOW METAL DOOR LITE KIT INFORMATION

	FIRE RATING	MAXIMUM GLAZING PERMITTED			
GLAZING LIMITATIONS FOR FIRE RATED HM DOORS	3 Hour	LS.18 Gauge Minimum, No Glass Permitted.			
	1-1/2 Hour	Maximum 100 Square Inches (0.064 M²) Per Leaf, Maximum Linear			
	3/4 Hour	Maximum 1296 Square Inches (0.835 M²) Per Leaf, Maximum Linear			

Narrow Lite (NL) 5x20

Location: 6" top rails x 6" strike side stile.

Long Narrow Lite (LNL) 5x??

Location: 6" top rails x 6" strike side stile. ?? Vert/Length: 6'8 = 32", 6'10 = 34", 7'0 = 36".

Long Narrow Lite 7'0 (LNL70) 5x54"

Location: 6" top rails x 6" strike side stile.

Double Long Narrow Lite (DLNL)

Loc: 6" top rail x 6" strike stile x 8" Midrail UPPER Lite: 6'8 = 32", 6'10 = 34", 7'0 = 36".

LOWER Lite: 5x24"

Vision Lite (VL) 10x10

Location: The top rail is typically approx. 16" (please

specify) x center in door width.

Half Lite (HL)

Location: 6" top rails x 6" strike side stiles. Horz/Width: Door width MINUS 12".

Vert/Length: 6'8 = 32", 6'10 = 34", 7'0 = 36".

Full Glass with Rail (FGWR)

Location: 6" top rails x 6" strike side stiles x 8" Midrail. Horz/Width: Applies to both the Upper and Lower Lites -

Door width MINUS 12".

UPPER Lite: Calc same as Half Lite (HL).

LOWER Lite Vert/Length: 24".

Full Glass (FG70)

Location: 6" top rails x 6" strike side stiles.


Only stocked for 3'0 x 7'0 doors.

Horz/Width: 24".

LOWER Lite Vert/Length: 68-1/2".



HOLLOW METAL DOOR LITE KIT INFORMATION

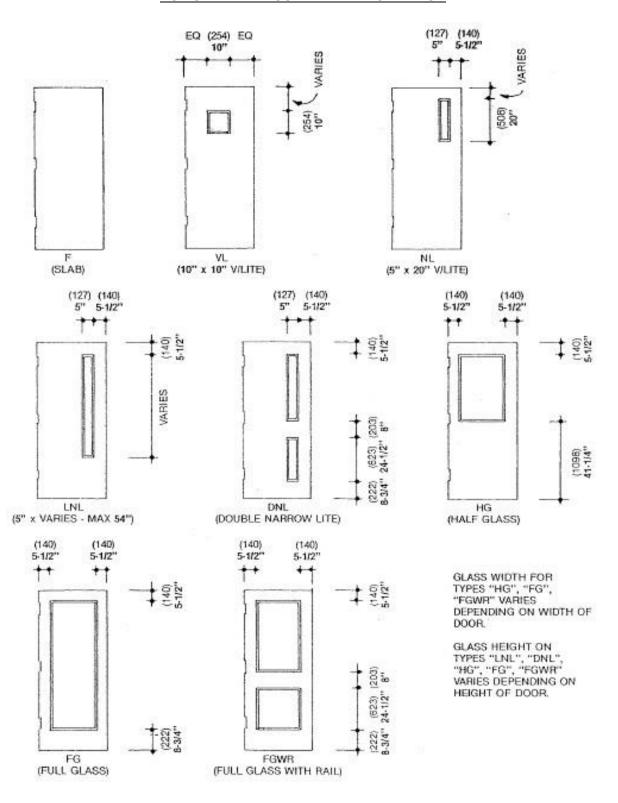



HOLLOW METAL DOOR LITE KIT INFORMATION

SNAP LITE KIT	This Kit is stocked in the component's sizes listed below. The gap is 3/8" for glass up to 1/4" thick plus glazing tape.	
THERMAL LITE KIT	This Kit is stocked in 10'0" lengths and each Kit is custom made. The gap is 1-1/8" for glass up to 1" thick plus glazing tape.	

SNAP LITE KIT COMPONENTS

Horizontal Sections									
			Glass	Cut-out			Vertical		
Description	Abbr.	Sec.Length	Size	Size	Sections				
									Cut-out
Narrow Lite	NLH	6-1/4"	6"	6-3/8"	Description	Abbr.	Sec.Length	Glass Size	Size
Vision Lite	VLH	11"	10-3/4"	11-1/8"	Vision Lite	VLV	12"	10-3/4"	11-1/8"
Half Glass x 2'6	HG26	18-1/4"	18"	18-3/8"	Narrow Lite	NLV	21"	19-3/4"	20-1/8"
Half Glass x 2'8	HG28	20-1/4"	20"	20-3/8"	Lower Lite for FGWR		25-1/4"	24	24-3/8"
Half Glass x 2'10	HG210	22-1/4"	22"	22-3/8"	Half Glass x 6'8	HG68	33-1/4"	32	32-3/8"
Half Glass x 3'0	HG30	24-1/4"	24"	24-3/8"	Half Glass x 6'10	HG610	35-1/4"	34	34-3/8"
Half Glass x 3'2	HG32	26-1/4"	26"	26-3/8"	Half Glass x 7'0	HG70	37-1/4"	36	36-3/8"
Half Glass x 3'6	HG36	30-1/4"	30"	30-3/8"	Long Narrow Lite	LNLV	55-1/4"	54	54-3/8"
Half Glass x 4'0	HG40	36-1/4"	36"	36-3/8"	Full Glass x 7'0	FG70	69-3/4"	68-1/2"	68-7/8"